

PowerCo Systems International Ltd.

UK MANUFACTURED GENERATORS

POWERCO MODEL:

PCS85-130V

VOLVO 500 SERIES TECHNICAL DATA SHEET

Cost Effective Power:

- Economic Power- Electronic fuel injection
- Reliable Power-High compression ratios
- Clean efficient power-Exceptional power to weight ratio
- Global distributor network



PowerCo	Volvo	380-415 50hz		480v 60hz	
Generating Set Model	Engine Model	KVA	KW	KVA	KW
PCS85V/1 (PRIME)	TD520GE	85	120	88	70
PCS94VS/1 (STANDBY)	TD520GE	94	132	96	77
PCS85V (PRIME)	TAD530GE	85	149	88	70
PCS94VS (STANDBY)	TAD530GE	94	160	96	77
PCS100V (PRIME)	TAD531GE	100	160	105	84
PCS110VS (STANDBY)	TAD531GE	110	176	116	92.4
PCS130V (PRIME)	TAD532GE	130	200	133	106
PCS143VS (STANDBY)	TAD532GE	143	220	148	117

RATING DEFINITIONS

Prime Power


These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and these models can supply 10% overload power for 1 hour in 12 hours.

Standby Power

These rating are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings.

DIMENSIONS AND WEIGHTS

Genset Models:	Net kg	Length mm	Width mm	Height mm
PCS85V/1	1200KG	2100	750	1780
PCS85V	1200KG	2100	750	1780
PCS100V	1245KG	2310	750	1780
PCS130V	1512KG	2310	750	1780

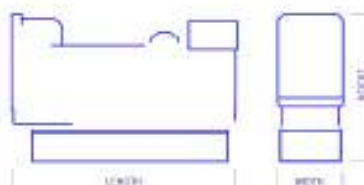

PowerCo Systems International Ltd.

Tel: ++(0) 845 643 1777 Fax: ++ (0) 845 643 1888

e-mail: sales@generatorsets.co.uk website: www.generatorsets.co.uk

continue overleaf...

VOLVO ENGINE TECHNICAL DATA

Generating Set Model:	PCS85V/1	PCS85V	PCS100V	PCS130V
Engine Manufacturer:	VOLVO	VOLVO	VOLVO	VOLVO
Model:	TD520GE	TAD520GE	TAD531GE	TAD532GE
Number of Cylinder:	6 In line	6 In line	6 In line	6 In line
Displacement:	4.76ltrs	4.76ltrs	4.76ltrs	4.76ltrs
Cycle	4 stroke	4 stroke	4 stroke	4 stroke
Cooling System	Water cooled	Water cooled	Water cooled	Water cooled
Combustion System	Direct Inj.	Direct Inj.	Direct Inj.	Direct Inj.
Bore/Stroke: (mm)	108X130	108X130	108X130	108X130
Aspiration:	Turbo charged	Turbo charged A2A	Turbo charged A2A	Turbo charged W2A
Direction of rotation	Anti-clockwise	Anti-clockwise	Anti-clockwise	Anti-clockwise
Lub. Oil Capacity ltrs:	13	13	13	13
Coolant capacity ltrs:	12.2	12.2	12.2	12.2
Electrical equipment	12vDC	12vDC	12vDC	12vDC
Compression Ratio:	17.5:1	17.5:1	17.5:1	17.5:1
50 hz				
Engine Speed:	1500rpm	1500rpm	1500rpm	1500rpm
Maximum Continuous Power at Flywheel: kw	78	78	88	112
Maximum Standby Power at Flywheel: kw	83	83	98	125
Fuel Cons: g/KWh				
110%	214	218	219	216
100%	213	217	218	214
75%	208	219	218	210
50%	213	231	225	213
60hz				
Engine Speed:	1800rpm	1800rpm	1800rpm	1800rpm
Maximum Continuous Power at Flywheel: kw	77	77	93	115
Maximum Standby Power at Flywheel: kw	85	85	104	129
Fuel Cons: g/KWh				
110%	216	219	218	225
100%	215	219	218	222
75%	217	223	221	218
50%	223	240	232	224

NOTE: All engine performance data based on our maximum continuous rating at the standard reference conditions specified.

Fuel consumption data at full load with a diesel fuel with a specific gravity of 0.85 conforming to BS2869: 1988, Class A2

ALTERNATOR MODELS

Mecc Alte (UK)	ECP34-1S	ECP34-1S	ECP34-2S	ECP34-1L
Newage Stamford	UC224G	UC224G	UCI274C	UCI274D
Leroy somer	LSA44.2VS3	LSA44.2VS3	LSA44.2VS45	LSA44.2S75

In line with our policy of continuous product development, we reserve the right to change specifications without notice.

STANDARD OPTION:

12/24volt axial starter motor
12/24v Heavy duty batteries
Engine driven charging alternator
Engine starting motor
Set mounted heavy duty tropical radiator and pusher fan
Fuel oil filter
Lub oil filter
Air intake filter
Energised to run solenoid
Low oil pressure switch
High engine temperature switch
Industrial silencer with flexible section
Mechanical/electrical governor or ECM(check with sales)
8hr base fuel tank upto 800kva
Open Skid base above 800kva
Captive AVMs
One set operation manuals
One set engine and alternator maintenance books
One set electrical schematic drawings
TESTING All units are fully tested in our works prior to despatch and each unit is issued with a Test Certificate.
WARRANTY All PowerCo equipment carries a full 12 month warranty in accordance with our conditions of sale. 24monthys warranties are available FOC for standby units running at limited hours (please checkwith sales for full details.

AVAILABLE OPTIONS:

55DBA-85DBA weatherproof acoustic canopies and containers
Residential silencers
Critical silencers
Full EEC trailers
Non EEC trailers
Free Standing fuel tanks
Bunded fuel tanks
Automatic fuel make-up system
Fuel level warnings
Unlimited other options are available.

ALTERNATOR:

We use Cummins Generator technology (Newage Stamford), Leroy Somer of France and also MeccAlte of the UK(upto 350kva) and MeccAlte of Italy (360-3000kva)
Brushless revolving field
4 pole
Class H Temperature rise 125/40
Class H Insulation
Automatic voltage regulator
Single bearing
0.5% Voltage regulation (Leroy)
1.0% Voltage regulation 200kva and above (MeccAlte)
1.5% Voltage regulation 0-180kva and above (MeccAlte)
0.5% Frequency regulation
TIF 50/NEMA MGI-22-43
THF >3%
RFI to BS800
50HZ Voltage range- 380/220 – 415/240v
60HZ Voltage range- 220/127 – 480/277v

SET MOUNTED DIGITAL CONTROL SYSTEM:

PowerCo model 6110 microprocessor engine control module provides metering and alarm facilities via the LCD display as follows:
Emergency stop pushbutton
Generator volts line/line
Generator volts line/neutral
Generator amps 3 phase
Generator frequency Hz
Engine speed
Engine oil pressure
Engine coolant temperature
Engine battery/volts
Engine hours run

PROTECTIONS:

Generator over-volts – shutdown
Generator under-volts – shutdown
Over speed – shutdown
Under speed – shutdown
Over frequency Hz – shutdown
Under frequency Hz – shutdown
High current – alarm
Battery charge fail – alarm
Emergency stop
Low oil pressure – shutdown
High engine temperature – shutdown
Fail to start – alarm
High battery volts – alarm
Low battery volts – alarm
Fail to come to rest – alarm
Loss of speed sensing signal – alarm
LED indication indicates – alarm
(amber) or shutdown (red flashing)
USB PROGRAMME PORT – standard printer cable connection

TIMERS:

Start delay
Stop delay
Crank/crank rest timer
Engagement attempt and manual crank limit
Safety on delay timer
Warm up timer
Cooling timer
Energise to stop timer

CONTROL SYSTEM UPGRADES:

7210 auto-start unit gives the following extra's:-
Generator KVA
Generator KW
Generator COS

5510 auto-synchronising unit gives you the following upgrades:-
Generator kVA L1, L2, L3, Total
Generator kW L1, L2, L3, Total
Generator Pf L1, L2, L3, Average
Generator kVAr L1, L2, L3, Total
Generator kWh
Generator kVAh
Generator kVArh
Generator Phase Sequence
Full automatic synchronising
Automatic load sharing
Automatic load level demand (switches units on and off line depending on load levels)

Automatic transfer panel (ATS) 25 – 1000A Contactors

IP55 wall or freestanding sheet steel cubicle with hinged front access door and base entry gland plate. Finished in grey epoxy polyester powder-coat.

AC1 Rating at 40°C

Fitted with;

- 1 x Pair of 4 pole mechanically and electrically interlocked contactors.
- x Set of load links and terminals upto 125A.
- 1 x Set of copper bar load links above 125A.
- 1 x 3 ph + N mains detector.
- 1 x Mains available indicator.
- 1 x Mains on load indicator.
- 1 x Generator available indicator.
- 1 x Generator on load indicator.
- 1 x Set of control and monitoring MCB's.
- 1 x Earth stud.
- 1 x Set of interconnecting terminals.
- 1 x Hazard warning label
- 1 x Rating label.

Dimensions 4 pole ;

25A – 125A	H600mm	x	W400mm	x	D200mm
200A – 450A	H800mm	x	W600mm	x	D300mm
550A – 1000A	H1200mm	x	W800mm	x	D400mm

Automatic transfer panel (ATS) 800 – 6300A Circuit Breaker

Floor-standing cubicle with hinged front access door and removable side and rear covers for ease of installation. Top and base entry aluminium gland plate. Control compartment IP2X and segregated from load switching. Secondary screening over switchgear. Finished in grey polyester powder-coat RAL7035.

Fitted with;

- 1 x Pair of motorised mechanically and electrically interlocked fixed pattern circuit breakers (Non Auto).
 - 800 - 1600A MCCB (MCS)
 - 800 – 6300A ACB
- 1 x Set of load connection terminals.
 - Generator / Mains / Load.
- 1 x Mains available indicator.
- 1 x Mains on load indicator.
- 1 x Generator available indicator.
- 1 x Generator on load indicator.
- 1 x Set of control and monitoring MCB's.
- 1 x Earth bar.
- 1 x Set of interconnecting terminals.
- 1 x Hazard warning labels
- 1 x Rating label.

Dimensions;

MCCB;

800 - 1600A H1800mm x W600mm x D800mm

ACB;

800A – 1600A H1800mm x W 600mm x D800mm

2000A H2000mm x W 800mm x D800mm

2500A – 3200A H2000mm x W1000mm x D800mm

4000A H2000mm x W2000mm x D800mm

5000A – 6300A H2000mm x W2400mm x D800mm